

块: MAIN
作者:
创建日期: 2017. 04. 06 13:26:26
上次修改日期: 2017. 04. 06 14:58:24

	地址	符号	变量类型	数据类型	注释
1	.	.	TEMP	.	.
2	.	.	TEMP	.	.
3	.	.	TEMP	.	.
4	.	.	TEMP	.	.

程序注释


程序段 1

程序段注释




符号	地址	注释
First_Scan_On	SM0.1	仅在第一个扫描周期时接通
MBUS_CTRL_Done	M0.0	Modbus主站初始化完成


程序段 2



符号	地址	注释
MBUS_CTRL_Done	M0.0	Modbus主站初始化完成
Start_MBUS_MSG	M0.1	

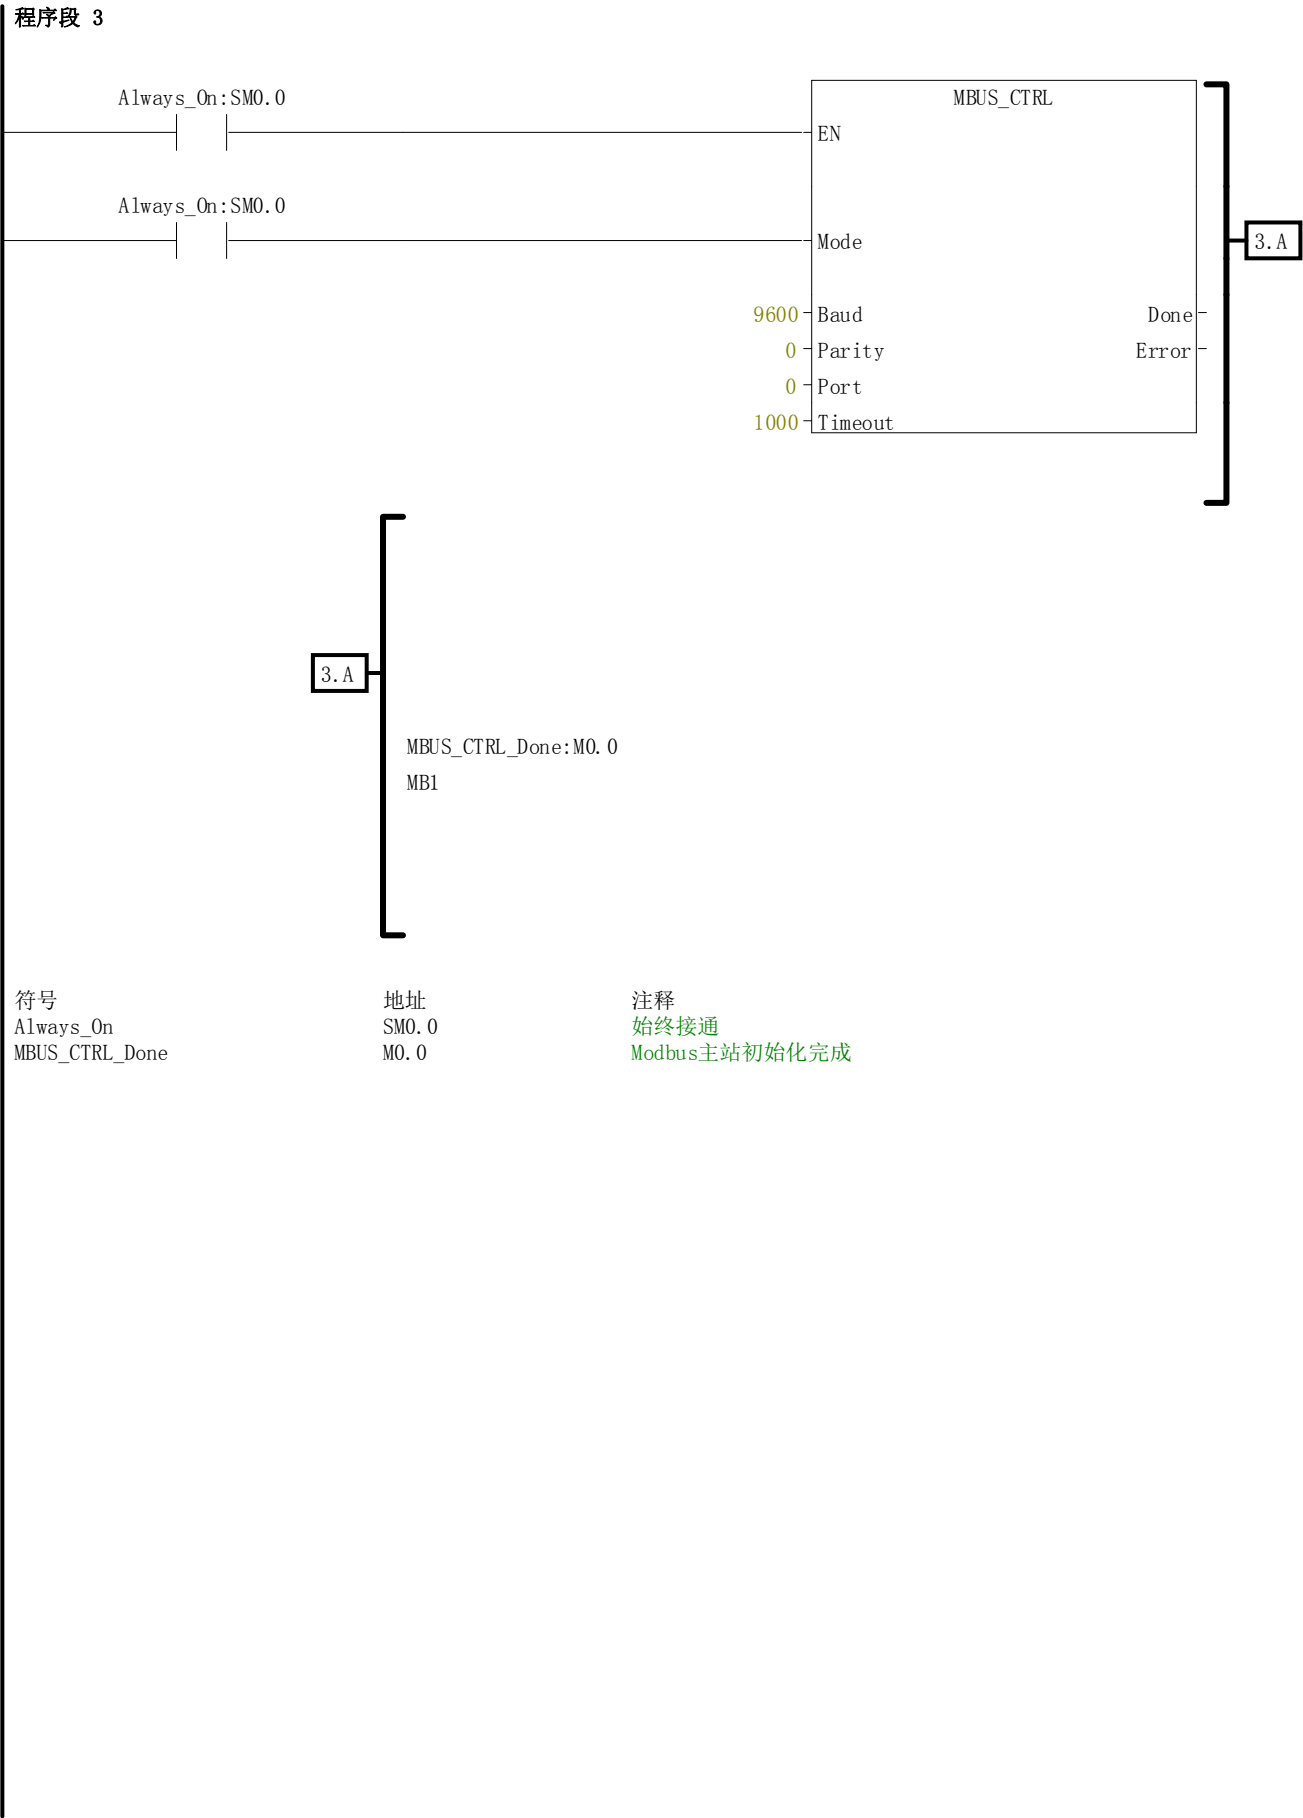


程序段 4

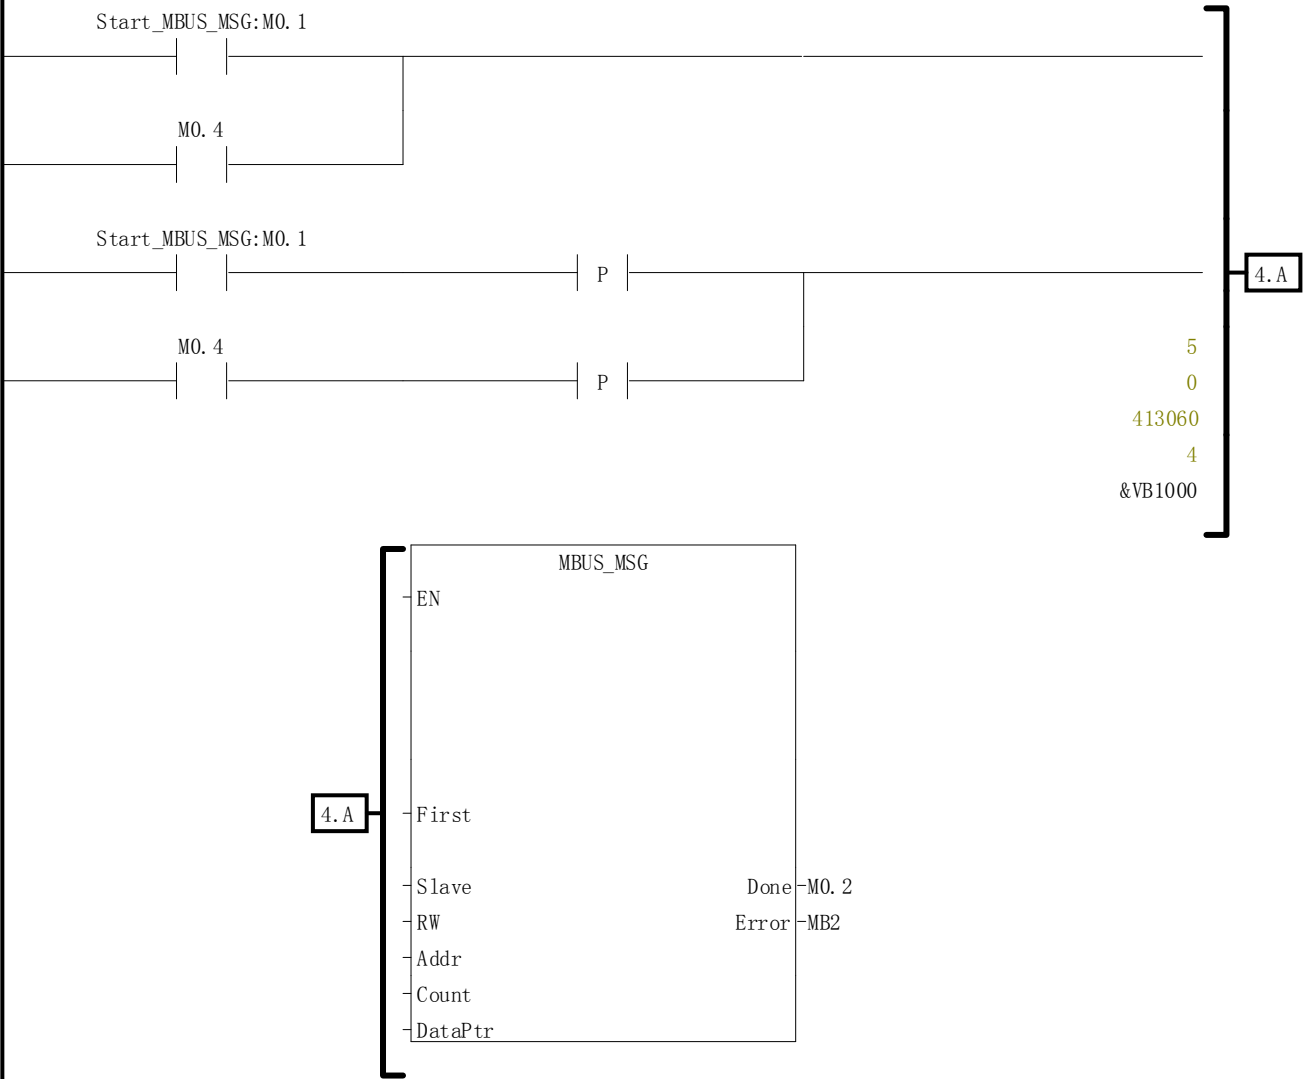


符号	地址	注释
Start_MBUS_MSG	M0.1	

程序段 5

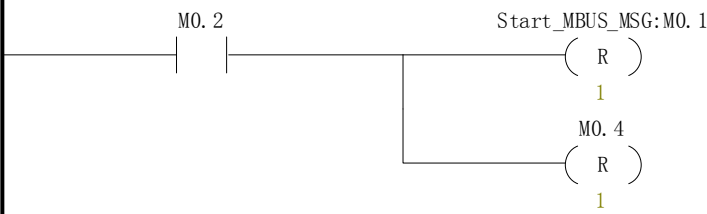

符号	地址	注释
Start_MBUS_MSG	M0.1	


程序段 6

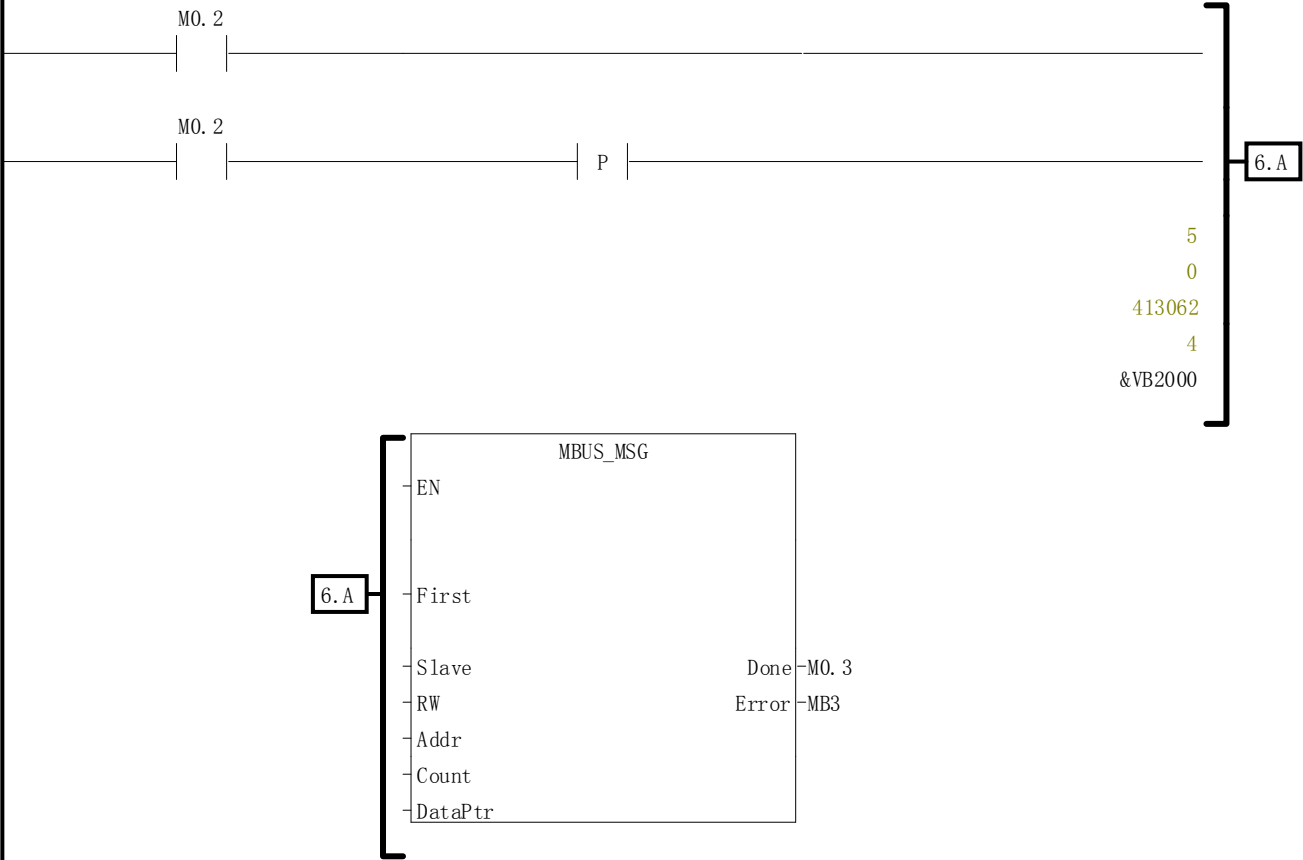

程序段 7



程序段 8

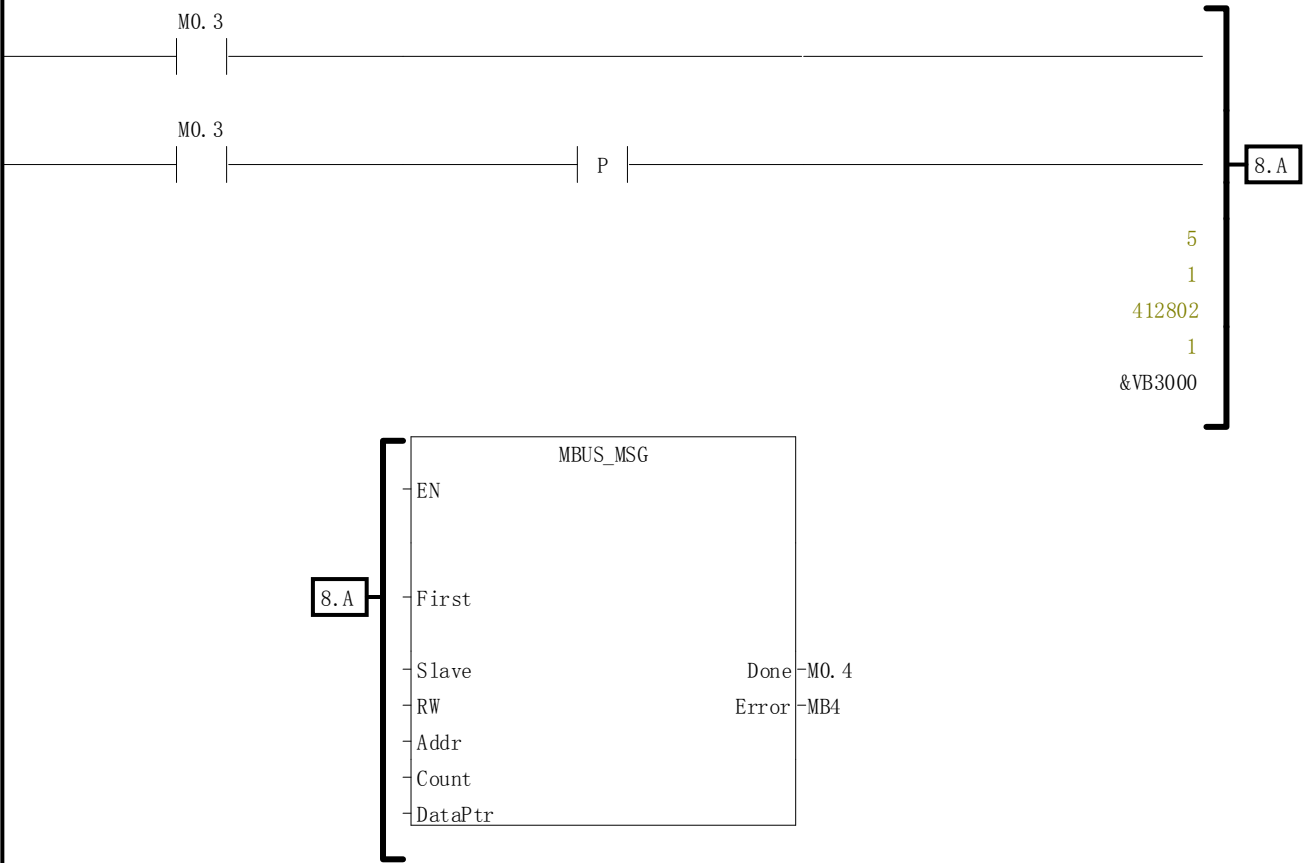

程序段 9




块: SBR_0
作者:
创建日期: 2017. 04. 06 13:26:26
上次修改日期: 2017. 04. 06 13:26:26

	地址	符号	变量类型	数据类型	注释
1	.	EN	IN	BOOL	.
2	.	.	IN	.	.
3	.	.	IN_OUT	.	.
4	.	.	OUT	.	.
5	.	.	TEMP	.	.

子程序注释

程序段 1

程序段注释



块: MBUS_CTRL
 作者:
 创建日期: 2005.12.01 8:45:14
 上次修改日期: 2012.05.03 16:48:36



	地址	符号	变量类型	数据类型	注释
1	.	EN	IN	BOOL	.
2	L0.0	Mode	IN	BOOL	1 = Modbus, 0 = PPI (stop Modbus)
3	LD1	Baud	IN	DWORD	1200, 2400 ... 115200
4	LB5	Parity	IN	BYTE	0 = none, 1 = odd, 2 = even
5	LB6	Port	IN	BYTE	0 or 1
6	LW7	Timeout	IN	INT	slave response timeout in milliseconds
7	.	.	IN	.	.
8	.	.	IN_OUT	.	.
9	L9.0	Done	OUT	BOOL	Done flag (always set)
10	LB10	Error	OUT	BYTE	Error status
11	.	.	OUT	.	.
12	LD11	AC0save	TEMP	DWORD	.
13	LD15	AC1save	TEMP	DWORD	.
14	LD19	AC2save	TEMP	DWORD	.
15	LD23	AC3save	TEMP	DWORD	.

This code is property of Siemens Industry, Inc.

块: MBUS_MSG
 作者:
 创建日期: 2005.12.01 8:46:21
 上次修改日期: 2012.05.03 14:20:47



	地址	符号	变量类型	数据类型	注释
1	.	EN	IN	BOOL	.
2	L0.0	First	IN	BOOL	New message (Set to a 1 for only one scan for a new request)
3	LB1	Slave	IN	BYTE	Slave address (0 - 247)
4	LB2	RW	IN	BYTE	Read = 0, Write = 1
5	LD3	Addr	IN	DWORD	Modbus addr (ie 40001)
6	LW7	Count	IN	INT	Number of elements (1- 120 words or 1 to 1920 bits)
7	LD9	DataPtr	IN	DWORD	Pointer to data (ie &VB100)
8	.	.	IN	.	.
9	.	.	IN_OUT	.	.
10	L13.0	Done	OUT	BOOL	Done flag (0 = busy, 1 = done)
11	LB14	Error	OUT	BYTE	Error (0 = no error)
12	.	.	OUT	.	.
13	LD15	AC0save	TEMP	DWORD	.
14	LD19	AC1save	TEMP	DWORD	.
15	LD23	AC2save	TEMP	DWORD	.

This code is property of Siemens Industry, Inc.

块: MBUSM1
作者:
创建日期: 2005.12.01 8:46:36
上次修改日期: 2012.05.03 14:20:47



	地址	符号	变量类型	数据类型	注释
1	.	EN	IN	BOOL	.
2	.	.	IN	.	.
3	.	.	IN_OUT	.	.
4	LW0	crc	OUT	WORD	.
5	.	.	OUT	.	.
6	LW2	count	TEMP	INT	.
7	LD4	ptr	TEMP	DWORD	.

This code is property of Siemens Industry, Inc.

块: INT_0
作者:
创建日期: 2017. 04. 06 13:26:26
上次修改日期: 2017. 04. 06 13:26:26

	地址	符号	变量类型	数据类型	注释
1	.	.	TEMP	.	.
2	.	.	TEMP	.	.
3	.	.	TEMP	.	.
4	.	.	TEMP	.	.

中断例程注释

程序段 1

程序段注释



块: MBUSM2
作者:
创建日期: 2005.12.01 8:46:47
上次修改日期: 2012.05.03 14:20:47



	地址	符号	变量类型	数据类型	注释
1	.	.	TEMP	.	.
2	.	.	TEMP	.	.
3	.	.	TEMP	.	.
4	.	.	TEMP	.	.

This code is property of Siemens Industry, Inc.